


N-Monitors N200P MK2

PROFESSIONAL PASSIVE MONITORING SYSTEM

Specification sheet

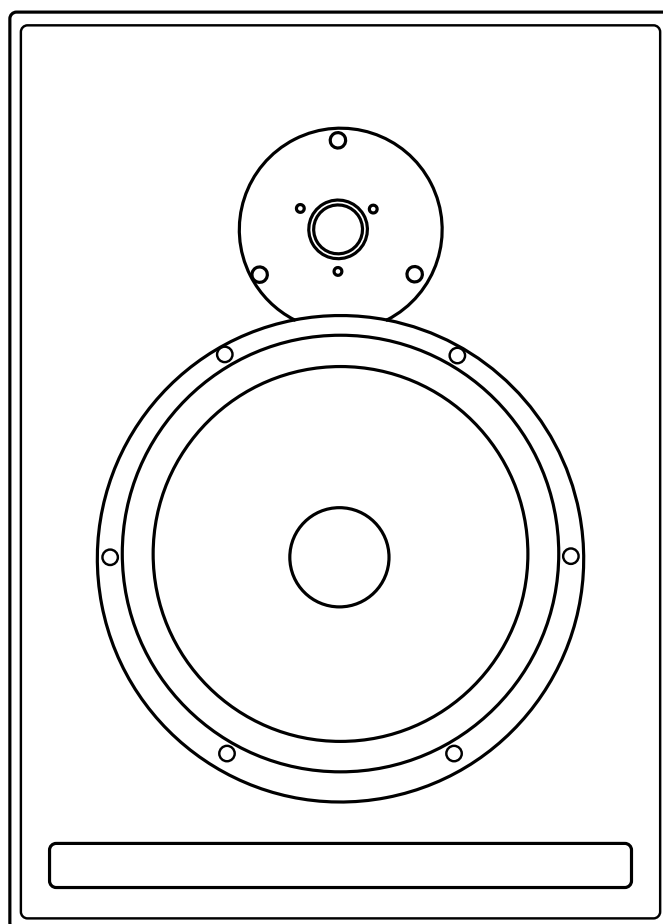

N-Acoustic. 460000 Orenburg – Russia. www.n-acoustic.ru

Due to constant technological advances, N-Acoustic reserves its right to modify specifications without notice. Images may not conform exactly to specific product.

N200P MK2 – PROFESSIONAL PASSIVE MONITORING SYSTEM

SPECIFICATION SHEET

PERFORMANCE	
System type	Two-way passive
Type of enclosure	Bass-reflex (QB3 approx.)
Frequency response	30Hz – 25kHz
Maximum SPL	108dB SPL
Sensitivity	88dB @2.83V , 1m
Impedance	8Ohm
Power Rating	AES 200W
	Recom. Amp. 60 - 300W (8 Ohm)

ELECTRONIC SECTION	
Type of crossover	Passive
Point of crossover	1800Hz
LP section	2 nd order network
HF Section	Imp. correct. Zobel network
	2 nd order network
Nominal impedance	8Ohm

DRIVERS		
LF/MF driver	Cone material	Pressed paper
	Susp.	Rubber
	Magnet	Strontium ferrite
	Diam.	200mm
	VC diam.	39mm
	Pwr. rating	150W
HF driver	Cone material	Aluminum-ceramic
	Susp.	Silk
	Magnet	Neodymium
	VC diam.	26mm
	Pwr. rating	100W (2.5kHz 2 nd order network)

CABINET	
Construction	16mm MDF
Finish	Warnex (black)
Dimensions(HxLxD)	414mm x 300mm x 350mm
Weight	11kg

N200P MK2 – PROFESSIONAL PASSIVE MONITORING SYSTEM

FREQUENCY RESPONSE 1/12 OCTAVE SMOOTHING

