


N-Monitors Sub10A

PROFESSIONAL ACTIVE SUBWOOFER

Specification sheet

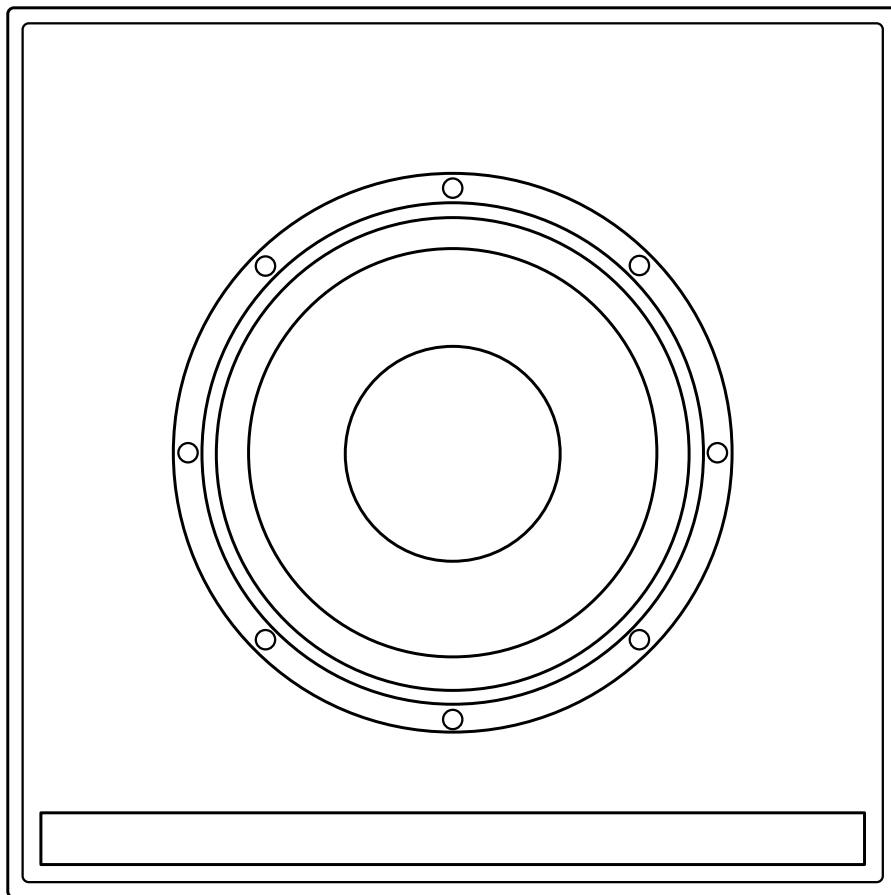

N-Acoustic. 460000 Orenburg – Russia. www.n-acoustic.ru

Due to constant technological advances, N-Acoustic reserves its right to modify specifications without notice. Images may not conform exactly to specific product.

PERFORMANCE	
System type	One-way bass-reflex active
Type of enclosure	Bass-reflex (QB3 approx.)
Frequency response	23Hz – 250Hz
Maximum SPL	115dB SPL
Amp.Power Rating	350W AES

ELECTRONIC SECTION	
Type of amp.	Discrete AB-class amplifier
Point of LP filter	35Hz-150Hz
Inputs	Analog RCA Unbalanced
	Hi-Level Binding Posts

DRIVER	
Cone material	Wattled fiberglass
Susp.	Rubber
Magnet	Strontium ferrite
Diam.	250mm
VC diam.	64mm 2 layer
Pwr. rating	500W

CABINET	
Construction	Internal braced cabinet with 32mm MDF front panel and 16mm side and back panels.
Finish	Warnex (black)
Dimensions(HxLxD)	430mm x 430mm x 430mm
Weight	27kg